

100300300-894 JAN 2002

FORM-PTO-1390 (Rev. 9-2001)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE	
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371		ATTORNEY'S DOCKET NUMBER 003300-894 U.S. APPLICATION NO. (if known, see 37 C.F.R. 1.5) 10/030624 Unassigned	
INTERNATIONAL APPLICATION NO. PCT/SE00/01478	INTERNATIONAL FILING DATE 11 July 2000	PRIORITY DATE CLAIMED 15 July 1999	
TITLE OF INVENTION PARTICLE SEPARATOR			
APPLICANT(S) FOR DO/EO/US LENNART AHLGREN and ERIK RENSFELT			
<p>Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information: It is contemplated that this Application be prosecuted while using Claims 1 to 17 that were submitted on January 31, 2001 during the international phase of examination as further amended in the Preliminary Amendment filed herewith.</p> <ol style="list-style-type: none"> 1. <input checked="" type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. 371. 2. <input type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371. 3. <input checked="" type="checkbox"/> This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (21) indicated below. 4. <input type="checkbox"/> The US has been elected by the expiration of 19 months from the priority date (Article 31). 5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2)) <ol style="list-style-type: none"> a. <input checked="" type="checkbox"/> is attached hereto (required only if not communicated by the International Bureau). b. <input checked="" type="checkbox"/> has been communicated by the International Bureau. c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US). 6. <input type="checkbox"/> An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)) <ol style="list-style-type: none"> a. <input type="checkbox"/> is attached hereto. b. <input type="checkbox"/> has been previously submitted under 35 U.S.C. 154(d)(4). 7. <input checked="" type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)) <ol style="list-style-type: none"> a. <input type="checkbox"/> are attached hereto (required only if not communicated by the International Bureau). b. <input type="checkbox"/> have been communicated by the International Bureau. c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired. d. <input checked="" type="checkbox"/> have not been made and will not be made. 8. <input type="checkbox"/> An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)). 9. <input checked="" type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)). (Signed Declaration will follow) 10. <input type="checkbox"/> An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)). <p>Items 11 to 20 below concern document(s) or information included:</p> <ol style="list-style-type: none"> 11. <input checked="" type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98. 12. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included. 13. <input checked="" type="checkbox"/> A FIRST preliminary amendment. 14. <input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment. 15. <input type="checkbox"/> A substitute specification. 16. <input type="checkbox"/> A change of power of attorney and/or address letter. 17. <input type="checkbox"/> A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825. 18. <input type="checkbox"/> A second copy of the published international application under 35 U.S.C. 154(d)(4). 19. <input type="checkbox"/> A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4). 20. <input checked="" type="checkbox"/> Other items or information: A certified copy of Swedish Application No. 9902711-2, filed 15 July 1999, was submitted during the international phase of examination. Thus the claim for priority has been perfected. 			



21839

531 Rec'd PCH

11 JAN 2002

U.S. APPLICATION NO. (If known, see 37 C.F.R. § 1.53) Unassigned		INTERNATIONAL APPLICATION NO. PCT/SE00/01478		ATTORNEY'S DOCKET NUMBER 003300-894	
10/030624				131	
21. <input type="checkbox"/> The following fees are submitted:				CALCULATIONS	
Basic National Fee (37 CFR 1.492(a)(1)-(5)): Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to U.S. PATENT AND TRADEMARK OFFICE and International Search Report not prepared by the EPO or JPO \$1,040.00 (960) International preliminary examination fee (37 CFR 1.482) not paid to U.S. PATENT AND TRADEMARK OFFICE but International Search Report prepared by the EPO or JPO \$890.00 (970) - International preliminary examination fee (37 CFR 1.482) not paid to U.S. PATENT AND TRADEMARK OFFICE but international search fee (37 CFR 1.445(a)(2)) paid to U.S. PATENT AND TRADEMARK OFFICE \$740.00 (958) - International preliminary examination fee (37 CFR 1.482) paid to U.S. PATENT AND TRADEMARK OFFICE but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$710.00 (956) International preliminary examination fee (37 CFR 1.482) paid to U.S. PATENT AND TRADEMARK OFFICE and all claims satisfied provisions of PCT Article 33(1)-(4) \$100.00 (962) ENTER APPROPRIATE BASIC FEE AMOUNT =				\$ 1,040.00	
Surcharge of \$130.00 (154) for furnishing the oath or declaration later than months from the earliest claimed priority date (37 CFR 1.492(e)). 20 <input type="checkbox"/> 30 <input type="checkbox"/>				\$	
Claims	Number Filed	Number Extra	Rate		
Total Claims	20 -20 =	0	X \$18.00 (966)	\$ --	
Independent Claims	4 -3 =	1	X \$84.00 (964)	\$ 84.00	
Multiple dependent claim(s) (if applicable)			+ \$280.00 (968)	\$ --	
TOTAL OF ABOVE CALCULATIONS =				\$ 1,124.00	
Reduction for ½ for filing by small entity, if applicable (see below). +				\$ 562.00	-
SUBTOTAL =				\$ 562.00	
Processing fee of \$130.00 (156) for furnishing the English translation later than months from the earliest claimed priority date (37 CFR 1.492(f)). 20 <input type="checkbox"/> 30 <input type="checkbox"/>				\$ --	
TOTAL NATIONAL FEE =				\$ 562.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 (581) per property +				\$ --	
TOTAL FEES ENCLOSED =				\$ 562.00	
				Amount to be refunded:	\$
				charged:	\$
a. <input checked="" type="checkbox"/> Small entity status is hereby claimed. b. <input checked="" type="checkbox"/> A check in the amount of \$ <u>562.00</u> to cover the above fees is enclosed. c. <input type="checkbox"/> Please charge my Deposit Account No. <u>02-4800</u> in the amount of \$ _____ to cover the above fees. A duplicate copy of this sheet is enclosed. d. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. <u>02-4800</u> . A duplicate copy of this sheet is enclosed. NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status. SEND ALL CORRESPONDENCE TO: Benton S. Duffett, Jr. BURNS, DOANE, SWECKER & MATHIS, L.L.P. P.O. Box 1404 Alexandria, Virginia 22313-1404 (703) 836-6620					
SIGNATURE Benton S. Duffett, Jr. NAME				22,030 REGISTRATION NUMBER	
				January 11, 2002 DATE	

10030624 022502
10/030624
531 Rec'd PCT/PT 11 JAN 2002

Patent
Attorney's Docket No. 003300-864

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Patent Application of)	
LENNART AHLGREN et al.)	BOX PCT
Application No.: (Unassigned))	Attention: DO/EO/US
Filed: January 11, 2002)	
For: PARTICLE SEPARATOR)	Group Art Unit: (Unassigned)
)	Examiner: (Unassigned)

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

This is a national phase filing of International Application No. PCT/SE00/01478,
filed July 11, 2000.

It is contemplated that this Application be prosecuted while using Claims 1 to 17
that were submitted on January 31, 2001 during the international phase of the examination.

Please amend the above-identified Application as indicated.

IN THE ABSTRACT:

Please add the Abstract of the Disclosure that is provided on a separate sheet.

IN THE CLAIMS:

Kindly replace claims 3, 10 to 13, and 15 to 17 as follows:

3. (Amended) Method according to claim 1, wherein in said cylindrical
coordinate system (r, ϕ , z) the gas is initially directed from a larger r-value towards a
smaller r-value, for the first separation step, and wherein after all separation steps have

been performed the gas, having been directed towards a smaller r-value in the last separation step, is led away in the z-direction.

10. (Amended) System according to claim 6, wherein said configuration has a generally cylindrical shape, preferably with the separator elements being arranged essentially symmetrically.

11. (Amended) System according to claim 6, wherein the separator elements have an elongated shape and extend essentially in parallel with the centre axis.

12. (Amended) System according to claim 6, wherein said separator elements are channel-shaped beams having an essentially U-shaped cross-section, wherein the beams are arranged so that the particles impinge upon the bottom of the U and then fall down, guided by the channel-shaped beam, to be collected.

13. (Amended) System according to claim 6, in which said set of separator elements forms a number of ring-shaped arrays being placed within each other.

15. (Amended) System according to claim 12, in which each U-shaped beam is provided with a respective additional U-shaped beam attached in parallel thereto, each of the additional U-shaped beams being provided with a respective further U-shaped beam separator element attached in parallel thereto, forming a unit with three U-shaped beam

channels, dividing plates being inserted in at least two U-shaped beam channels for mechanical segregation of said channels and a section of at least one of the elements in the unit being removed, so as to create three particle separation levels of impinge areas, one for each element in the unit, wherein said directional means are arranged to direct the gas in alternative level directions.

16. (Amended) System according to claim 6, wherein the particle separator is located inside a reactor, preferably at the upper portion thereof, and wherein said centre axis is in parallel with the axis of the reactor, preferably co-axially.

17. (Amended) System according to claim 6, wherein said configuration is circular cylindrical.

Please add the following new claims 18 to 20.

18. (New) Method according to claim 2, wherein in said cylindrical coordinate system (r, ϕ, z) the gas is initially directed from a larger r -value towards a smaller r -value, for the first separation step, and wherein after all separation steps have been performed the gas, having been directed towards a smaller r -value in the last separation step, is led away in the z -direction.

Application No. (Unassigned)
Attorney's Docket No. 003300-864
Page 4

19. (New) System according to claim 7, wherein said configuration has a generally cylindrical shape, preferably with the separator elements being arranged essentially symmetrically.

20. (New) System according to claim 9, wherein said configuration has a generally cylindrical shape, preferably with the separator elements being arranged essentially symmetrically.

Application No. (Unassigned)
Attorney's Docket No. 003300-864
Page 5

REMARKS

The present Amendment adds an Abstract of the Disclosure on a separate sheet and modifies the claim format only so as to eliminate the use of multiple dependency.

An Information Disclosure Statement is being filed concurrently herewith.

The examination and allowance of the Application are respectfully requested.

Respectfully submitted,

BURNS, DOANE, SWECKER & MATHIS, L.L.P.

By: Benton S. Duffett Jr.
Benton S. Duffett, Jr.
Registration No. 22,030

P.O. Box 1404
Alexandria, Virginia 22313-1404
(703) 836-6620

Date: January 11, 2002

Application No. (Unassigned)
Attorney's Docket No. 003300-864
Mark-up of Specification - Page 1 of 1

Attachment to Preliminary Amendment dated January 11, 2002
Mark-Up of Claims 3, 10 to 13, and 15 to 17

3. (Amended) Method according to claim 1 [or 2], wherein in said cylindrical coordinate system (r, ϕ, z) the gas is initially directed from a larger r -value towards a smaller r -value, for the first separation step, and wherein after all separation steps have been performed the gas, having been directed towards a smaller r -value in the last separation step, is led away in the z -direction.

10. (Amended) System according to [any one of claims 6, 7 or 9] claim 6, wherein said configuration has a generally cylindrical shape, preferably with the separator elements being arranged essentially symmetrically.

11. (Amended) System according to [any one of claims 6-10] claim 6, wherein the separator elements have an elongated shape and extend essentially in parallel with the centre axis.

12. (Amended) System according to [any one of claims 6-11] claim 6, wherein said separator elements are channel-shaped beams having an essentially U-shaped cross-section, wherein the beams are arranged so that the particles impinge upon the bottom of the U and then fall down, guided by the channel-shaped beam, to be collected.

Application No. (Unassigned)
Attorney's Docket No. 003300-864
Mark-up of Specification - Page 2 of 2

Attachment to Preliminary Amendment dated January 11, 2002
Mark-Up of Claims 3, 10 to 13, and 15 to 17

13. (Amended) System according to [any one of claims 6-12] claim 6, in which said set of separator elements forms a number of ring-shaped arrays being placed within each other.

15. (Amended) System according to claim 12, [or any one of claims 13-14 when dependent of claim 12,] in which each U-shaped beam is provided with a respective additional U-shaped beam attached in parallel thereto, each of the additional U-shaped beams being provided with a respective further U-shaped beam separator element attached in parallel thereto, forming a unit with three U-shaped beam channels, dividing plates being inserted in at least two U-shaped beam channels for mechanical segregation of said channels and a section of at least one of the elements in the unit being removed, so as to create three particle separation levels of impinge areas, one for each element in the unit, wherein said directional means are arranged to direct the gas in alternative level directions.

16. (Amended) System according to [any one of claims 6-17] claim 6, wherein the particle separator is located inside a reactor, preferably at the upper portion thereof, and wherein said centre axis is in parallel with the axis of the reactor, preferably co-axially.

17. (Amended) System according to [any one of claims 6-16] claim 6, wherein said configuration is circular cylindrical.

Application No. (Unassigned)
Attorney's Docket No. 003300-864
Mark-up of Abstract - Page 1 of 1

Attachment to Preliminary Amendment dated January 11, 2002

Abstract of the Disclosure

The present invention relates to a method for separating entrained particles from a gas in a fluidised bed reactor system and fluidised bed reactor system including a particle separator for separating entrained particles from a gas. The particles are separated from the gas flowing in a direction other than the main gas flow direction, whereby the separation is multidimensional. The gas is allowed to pass from the outside of the configuration to the inside thereof and/or vice versa, wherein the particles are separated from the gas during such a travel. The gas flow can be multileveled.

PARTICLE SEPARATORTechnical field of the Invention

The present invention relates to a method for separating entrained particles from a gas in a fluidised bed reactor system and a fluidised bed reactor system including a particle separator for separating entrained particles from a gas.

Background art

10 In the fields of pyrolysis, gasification and combustion, it is common to provide the reactor of a boiler or a combustion apparatus with a bed of particles, which, among other advantages, greatly enhances heat transfer because of the high heat carrying capacity of the particles. The bed is usually placed in the lower portion of the reactor. Fluidising air or gas entrains the particles with a gas flow inside the reactor. At the upper portion of the reactor, or outside the reactor, the particles are separated from the gas flow by separators.

15 20 In a circulating fluidised bed the particles are recirculated to the lower portion of the reactor, from where they can once again be entrained in the gas flow.

There are basically two types of separators: non-centrifugal mechanical particle separators and cyclone-type particle separators.

Examples of non-centrifugal mechanical particle separators are disclosed in WO 83/03294, US 5,025,755, US 5,082,477 and US 5,064,621.

In WO 83/03294 a boiler is disclosed having a non-centrifugal mechanical particle separator outside the reactor.

In US 5,025,755 an apparatus is disclosed having a non-centrifugal mechanical particle separator in the upper portion of the reactor.

An example of a cyclone-type particle separator disposed in the upper portion of a reactor is disclosed in US 5,070,822.

5 Summary of the Invention

An object of the present invention is to achieve a compact particle separator.

Another object of the invention is to achieve a particle separator that is easily mountable and
10 demountable inside a reactor.

These and other objects which will become apparent in the following are achieved by a fluidised bed reactor system and a method for separating particles as defined in the accompanied claims.

15 The present invention is based on the insight of the advantages of separating particles in a direction other than the "main flow direction". The term "main flow direction" is generally referred to here as the direction of a line drawn between a point before the gas enters the
20 separator and a point after the gas exits the separator. In prior art non-centrifugal mechanical separators, the separator elements are conventionally positioned so as to separate the particles from the gas flowing substantially in the "main flow direction". In other words, the
25 separation direction is one-dimensional. According to the present invention, however, the particles can be separated from the gas flowing in a direction other than the "main flow direction", whereby the separation is multidimensional.

30 Also, it has been realised that the particle separator can be made compact in a configuration that allows the gas to pass from the outside of the configuration to the inside thereof and/or vice versa, wherein the particles are separated from the gas during
35 such a travel.

According to one aspect of the present invention a method is provided for separating entrained particles

from a gas in a fluidised bed reactor system which comprises a separation region defined by a cylindrical r -, ϕ -, z -coordinate system, the method comprising the consecutive steps of:

- 5 - leading the gas in the z -direction (axial direction),
 - diverting the gas to flow substantially in the r -direction (radial direction), while keeping the gas circumferentially distributed in $r\phi$ -planes, and
 - mechanically separating the particles from the gas
- 10 while the gas is flowing substantially in the r -direction.

According to another aspect the present invention provides a fluidised bed reactor system including a particle separator for separating entrained particles

15 from a gas having a flow path. The particle separator comprises a set of non-centrifugal mechanical separator elements disposed in the flow path of the gas, so that the gas is able to pass between the separator elements while the inertia of the particles directs them to the

20 separator elements upon which they impinge and are separated and removed from the gas flow. The set of separator elements is arranged in a configuration having a centre zone with a centre axis, and a circumference. Directional means are provided for directing the gas so

25 that gas passing through the set of separator elements flows from the circumference to the centre zone of the configuration and/or vice versa.

Thus, as mentioned above, according to the present invention the particles are separated from the gas

30 multidimensionally instead of the traditional one-dimensional separator passage as far as non-centrifugal mechanical particle separator elements are concerned. In mathematical terms, instead of a separation in the x -direction in an orthonormal x -, y -, z -coordinate system,

35 the present invention provides separation in the r -direction in a cylindrical r -, ϕ -, z -coordinate system, where:

$$r = x \cdot \cos\phi + y \cdot \sin\phi$$

Hence, the region where the separation is performed
5 is conveniently defined by a cylindrical coordinate
system. Gas will be led to flow in the z-direction or
axial direction of the separation region. Thereafter, the
gas is diverted to flow substantially in the r-direction
or radial direction of the separation region. This does
10 not necessarily mean that the gas will be diverted in a
direction which is totally perpendicular to the axial
direction, but merely that the gas will flow to or from a
centre zone. During this diverting action the gas is kept
circumferentially distributed in $r\phi$ -planes, i.e. disk
15 shaped planes. Accordingly, the gas does not have to flow
from or to just one side of the separation region, but
substantially from or to the whole circumference of the
separation region. It is during this radial flow that the
particles are separated from the gas.

20 According to a further aspect the separator elements
are arranged as a structure having consecutive particle
separation levels X_N ($X_1, X_2, X_3, \dots, X_N \dots$), N being an
integer. The directional means are arranged at the
circumference and at the centre zone of the
25 configuration, so as to cause the gas to flow through the
separator elements in one direction on levels with odd-
numbered N and in the reversed direction on levels with
even-numbered N .

The obvious advantage of this is that, when the
30 separator elements preferably being provided as one set
of separator elements, one and the same separator element
is passed by the flowing gas repeated times. Thus
particles that have not impinged upon the separator at
the first pass, can be captured on the following
35 pass(es), thus making the most of each separator element.

Aptly, the configuration has a generally cylindrical
shape, preferably with the separator elements being

arranged essentially symmetrically. Note that the term "cylindrical" does not necessarily imply that the cross-section is circular.

Preferably, the separator elements have an elongated shape and extend essentially in parallel with the centre axis.

It is advantageous to use channel-shaped beams as separator elements, the beams having an essentially U-shaped cross-section. The beams are arranged so that the particles impinge upon the bottom of the U and then fall down, guided by the channel-shaped beam, to be collected.

In order to further enhance the efficiency of the system, the set of separator elements can form a number of ring-shaped arrays being placed within each other. The separator elements of an array are preferably circumferentially displaced with respect to the separator elements of an adjacent array.

Consequently, the separator elements of the different arrays can be arranged in a staggered way with an angular offset with respect to each other. Those particles that do not impinge on separator elements of one array can be disentrained from the gas to a great extent by the separator elements of an adjacent array. Of course the number of arrays is chosen according to what is considered appropriate, with respect to compactness, efficiency etc.

According to a specific embodiment, each separator element, being in form of a U-shaped beam, is provided with a respective additional U-shaped beam attached in parallel thereto. Moreover, each of the additional U-shaped beams is provided with a respective further U-shaped beam attached in parallel thereto, forming a unit with three U-shaped beam channels. Dividing plates are inserted in at least two U-shaped beam channels for mechanical segregation of said channels and a section of at least one of the elements in the unit is removed, so

as to create three particle separation levels of impinge areas, one for each element in the unit. Directional means are arranged to direct the gas in alternating level directions.

5 A three-channel unit design can be constructed with three identical U-beams or with three non-identical U-beams. For instance, a tapered design may be used. This is particularly practical inside a circular reactor shaft, in which case the element located nearest the
10 shaft centre would have a smaller cross-section than the intermediate element, which in turn would have a smaller cross-section than the element furthest away from the centre.

Due to the configuration of a particle separator
15 according to the invention, it is particularly suitable for disposal inside a reactor shaft. Even though the separator elements are preferably arranged in a symmetrical and circular configuration, it is also possible to arrange the separator elements in other
20 configurations, such as triangular, square, other polygon or in any other desired way. When the particle separator is intended to be used inside a reactor shaft, it is favourable to have the configuration adapted to the cross-section of the reactor shaft.

25 After the particles have been disentrained they fall down from the separator elements to some form of collector located below. The disentrained particles can advantageously be recycled to the reactor bed by a standpipe.

30 When the particle separator is disposed inside the reactor, an internal standpipe located around the centre axis of the reactor can be used. In this case, the fluidising gas with entrained particles suitably flows from the bottom portion to the top portion of the
35 reactor, generally symmetrically around the internal standpipe. The particle separator, preferably being disposed at the top portion of the reactor, disentrains

the particles from the gas, which exits the reactor. The particles are then recycled through the internal standpipe in the centre of the reactor.

Of course it is also possible to let an internal
5 standpipe be positioned off-centred, e.g. extending along the wall of the reactor. In this case it might be desirable to have more than one standpipe. The choice of an off-centred alternative provides for the possibility of letting the gas enter the particle separator from the
10 centre of the configuration and consequently the disentrained particle can advantageously be caused to fall down at the circumference thereof.

The above description is related to a circulating fluidised bed. The person skilled in the art will realise
15 that the present invention can be utilised in other connections as well. The skilled person will also realise that the particle separator of the present system can be located outside a reactor, and not only inside.

20 Brief description of the drawings

The invention will be more closely described in the following in relation to non-limiting embodiments thereof with reference to the drawings, in which:

Figure 1 illustrates schematically a cross-section
25 of a fluidised bed reactor system according to the present invention.

Figure 2 illustrates an example of a cross-section through the particle separator in the top portion of the reactor in Figure 1.

30 Figures 3a-3b illustrate different particle separator arrangements.

Figures 4a-4c illustrate different types of separator element units consisting of three integrated U-shaped beams.

35 Figures 5a-5c illustrate the three U-shaped beams of Figure 4c individually.

Figure 6 illustrates the flow path through the beams of Figures 5a-5c, when they have been attached to each other.

5 Detailed description of preferred embodiments of the invention

Figure 1 illustrates schematically a cross-section of a circulating fluidised bed reactor system 1, comprising a particle separator 4, according to the
10 present invention. The system 1 has an elongated reactor 6, in which a particle bed is disposed in the lower portion of the reactor 6 on a distributor plate 8. Below the bed is an inlet 10 for primary gas, and above are two inlets 12 for secondary gas. The reactor 6 has an
15 enlarged cylindrical top portion, the outer wall 13 of which has a larger diameter than the rest of the reactor 6. A particle separator 4 having elongated U-shaped beams 14 as separator elements, constituting a cylindrical configuration, is housed in said top portion. In use, the
20 flow path of the gas is as follows. Primary gas enters the reactor 6 through the inlet 10 for primary gas, is distributed by distributor plate 8, entrains particles from the particle bed, travels vertically up the reactor 6, mixes with secondary gas entering from the inlets 12
25 for secondary gas, reaches the particle separator 4 where the only path available for the gas is horizontally through the particle separator 4, thus passes the U-shaped beams 14 and finally exits vertically through a gas outlet 16.

30 However, the majority of the particles entrained in the gas flow are separated therefrom by the elongated U-shaped beams 14. The particles fall into a funnel-shaped particle collector 18 and are returned to the bottom portion of the reactor 6 through an internal
35 standpipe 20, so that they can be entrained in the gas flow again. The standpipe 20 extends in the centre of the reactor 6 from the bottom of the particle collector 18 to

a level between the inlets 12 for secondary gas and the distributor plate 8.

The gas and any particles by-passing the U-shaped beams 14 then pass to a conventional cyclone 100.

5 Material disentrained by the cyclone 100 fall into an external standpipe 102 and are recycled through a line 104 running from a port 106 just above the base of the external standpipe 102 to a port 108 on the reactor 6 between the distributor plate 8 and the inlets 12 for
10 secondary gas. Recirculation is initiated by fluidisation of the external standpipe 102 via a distributor plate 110 at the base. Gas from the cyclone 100 passes to an exhaust stack 112.

Figure 2 illustrates an example of a cross-section
15 through the particle separator 4 in the top portion of the reactor 6 in Figure 1. As can be seen, two rings 22, 24 of U-shaped beams 14 are arranged concentrically, within the outer wall 13 of the top portion. The small arrows indicate the direction of the gas as it enters the configuration. Even though the figure illustrates a
20 radial gas flow from the outside to the inside of the configuration, the skilled person appreciates that the reverse direction would also be practicable, in which case the U-shaped beams 14 would suitably be turned
25 around with the opening of the U facing inwards. In the figure the beams of the inner ring 24 are displaced in the circumferential direction of the reactor with respect to the beams of the outer ring 22. With this arrangement the beams of the inner ring 24 effectively shield the gas
30 that by-passes the beams of the outer ring 22.

Figure 3a illustrates a configuration having a stacked multileveled gas flow. The top of each beam 14 is mounted to a suspension attachment 15 so that the beams 14 are vertically suspended. The beams 14 can be freely
35 suspended so as to allow them to expand in their longitudinal direction as the temperature rises. The illustrated configuration of beams can be said to

comprise three main levels or sections: a lower section A, a middle section B and an upper section C. The beams 14 are supported by horizontal support plates 26a-c (three shown) connected by support bars (not shown) to

5 hold the support plates 26a-c in correct vertical alignment. The support plates 26a-c define the top of each section A-C. A cover plate 28 disposed in the centre of the configuration is mounted on top of the middle support plate 26b. The support plates 26a-c and the cover

10 plate 28 forces the gas to flow in alternating level directions, as indicated by the solid arrows in the figure. Thus, when the gas vertically enters the configuration at the lower section A, the support plate 26A redirects it into the horizontal direction to a

15 radial inwardly flow. Next the gas passes up to the middle section B, where it is forced by the cover plate 28 to once again flow horizontally, this time in a radial outwardly flow. Thereafter, having reached the upper section C, the gas is forced to flow inwardly by the

20 support plate 26c. Finally, the gas vertically exits the configuration from the centre thereof. Naturally, support plate 26c could be removed without substantially altering the flow path of the gas. Furthermore, although not shown in the figure, the support plate positioning can be made

25 variable and, thus, so can the beam height, making it possible to utilise a larger or smaller part of the beams according to preference. The non-solid arrows represent particles separated from the gas flow falling from the bottom of the U in the beams into the funnel-shaped

30 collector 18 and then passing to the internal standpipe 20. Thus, the particles will impinge on the inside bottom of the U in the beams at sections A and C, if the beams are oriented as in figure 2. Of course it would also be possible to turn them in the reverse orientation, or to

35 arrange the beam rings with different orientations, one beam ring with the opening of the U facing the centre and

the other beam ring with the opening of the U facing the circumference.

In Figure 3b the cover plate 28 in Figure 3a has been removed and a pipe 34 has been inserted extending from the lower support plate 26a to the gas outlet 16. Thus, the gas flows past the U-shaped beams 14 only once. This arrangement gives a shorter residence time through the particle separator, which at times might be preferred. Depending on stability requirements, the alternative would be to remove the support plates 26a-c in order to take advantage of the full length of the beams 14, as shown in figure 1, or only to change the positioning of the support plate 26a-c in order to obtain a desired length.

Figures 4a-4c illustrate different types of separator element units consisting of three integrated U-shaped beams. Similarly to the embodiment shown in Figure 3a, these triple-units are adapted to provide for a multileveled flow. However, to make this possible a section of one of the beams must be removed and separating plates be inserted, as will be explained in connection with Figures 5a-5c and Figure 6.

Three different constructions are shown in Figures 4a-4c. As has been discussed above a tapered construction (Figure 4a) may be desired, e.g. inside a circular reactor shaft, in which case the beam 40 located nearest the shaft centre has a smaller cross-section than the intermediate beam 42, which in turn has a smaller cross-section than the beam 44 furthest away from the centre.

If a tapered design is not considered necessary, the constructions illustrated in Figures 4b and 4c may be used. The construction of Figure 4c requires the lowest number of separating plates, and this is the embodiment shown in Figures 5a-5c and Figure 6. Note that in reality the three beams 50, 52 and 54 are attached to each other, e.g. by spot welding, however, in Figure 4c they are shown somewhat separated for sake of clarity.

Figures 5a-5c illustrate the three U-shaped beams of Figure 4c individually. The beams each have a lower section A, a middle section B and an upper section C, from which three particle separation levels will be achieved.

In Figure 5a the first beam 50 is illustrated. At the upper section 50C of the beam 50, the bottom of the U has been removed. At the middle section 50B of the beam 50 two separating plates 60, 62 are inserted perpendicularly to the bottom of the U, and a plate 64 parallel thereto covering the area between the perpendicularly inserted separating plates 60, 62. Thus, a box has been provided over the middle section 50B mechanically separating the three sections 50A-C from each other.

In Figure 5b the second beam 52 is illustrated. As can be seen it is a standard U-shaped beam with no modifications.

In Figure 5c the third beam 54 is illustrated. A separating plate 66 is inserted perpendicularly to the bottom of the U, at the transition between the upper section 54C and the middle section 54B of the beam 54. A plate 68 extending upwards from the separating plate 66 covers the upper section 54C of the beam 54. Thus the upper section 54C is mechanically separated from the middle section 54B and the lower section 54A. A plate 70 arranged parallel to the bottom of the U is covering the lower section 54A of the beam 54.

Figure 6 illustrates the gas flow path (solid arrows) through the beams 50, 52, 54 of Figures 5a-5c, when they have been attached to each other, and the respective parts have been depicted with the same reference numerals. The gas directed by a support plate 72 and separating plate 62 enters the configuration at the lower section 50A of the first beam 50. While the particles can impinge on the bottom of the U of the first beam 50, the gas passes all three beams (between two

adjacent triple-units). Next, the gas flows upwards but is hindered by a cover plate 74, which corresponds to the cover plate 28 in Figure 3a, forcing in co-operation with separating plate 66 the gas to flow back past the three
5 beams. However, remaining particles can impinge on the bottom of the U of the third beam 54, at the middle section 54B thereof. Note that the gas can only enter the third beam 54 at its middle section 54B because of the plate 70 covering the lower section. Thereafter, the gas
10 is caused to double-back again by a support plate 76, and enters the first beam 50 at the upper section 50c thereof. The plate 64 refuses entrance of the gas at the middle section of the first beam 50. Since the bottom of the U is removed at section 50c and the separating plate
15 60 is provided for mechanical isolation of the upper section from the other sections, the gas will pass through the first beam 50 to the second beam 52. This time remaining particles can impinge on the bottom of the U of the second beam 52, at the upper section 52C
20 thereof. Finally, having no other way to flow (because of plate 68 and cover plate 74) the gas exits through the gas outlet 16.

This triple-unit beam design is preferably arranged in a circular configuration as the beams in fig. 2. Thus,
25 although not shown, to the left of the triple-unit is the outer wall of the top portion of the reactor, and to the right is the centre of the reactor (compare with the left half of fig. 3).

It is to be noted that numerous modifications and
30 variations can be made without departing from the scope of the present invention defined in the accompanied claims.

CLAIMS

1. Method for separating entrained particles from a
5 gas in a fluidised bed reactor system which comprises a
separation region defined by a cylindrical r -, ϕ -, z -
coordinate system, the method comprising the consecutive
steps of:
- leading the gas in the z -direction (axial direction),
 - 10 - diverting the gas to flow substantially in the
 r -direction (radial direction), while keeping the gas
circumferentially distributed in $r\phi$ -planes, which means
that the gas is allowed to flow to and/or from
substantially the whole circumference of the separation
15 region in said $r\phi$ -planes, and
 - mechanically separating the particles from the gas
while the gas is flowing substantially in the
 r -direction.
- 20 2. Method according to claim 1, comprising the
further steps of:
- causing the gas having flown in said r -direction to
flow in the reversed r -direction,
 - mechanically separating the particles from the gas
 - 25 while the gas is flowing in the reversed r -direction, and
 - optionally, further reversing the direction of gas flow
and mechanically separating the particles from the gas as
above.
- 30 3. Method according to claim 1 or 2, wherein in said
cylindrical coordinate system (r, ϕ, z) the gas is
initially directed from a larger r -value towards a
smaller r -value, for the first separation step, and
wherein after all separation steps have been performed
35 the gas, having been directed towards a smaller r -value
in the last separation step, is led away in the z -
direction.

31-01-2001

15

4. Method for separating entrained particles from a gas in a fluidised bed reactor system, comprising the steps of:

- 5 - causing the gas to flow in a stacked multileveled flow with consecutive particle separation levels X_N ($X_1, X_2, X_3, \dots, X_N$), N being an integer,
- directing the gas to flow in a first direction on the first level X_1 ,
- 10 - bringing the gas to the next level X_2 from said first level X_1 ,
- directing the gas to flow in a direction reversed to said first direction on said next level X_2 , so as to create a doubled-back flow path,
- 15 - optionally, bringing the gas to additional particle separation levels, so as to cause the gas to flow in the first direction on levels with odd-numbered N and in the reversed direction on levels with even-numbered N , and
- 20 - mechanically separating the particles from the gas on each level.

5. Method according to claim 4, in which the gas is caused to flow from a centre zone to a circumference of said centre zone or vice versa, whereby said directions are essentially radial directions in respect of the centre zone and the circumference associated thereto.

6. Fluidised bed reactor system including a particle separator for separating entrained particles from a gas having a flow path, comprising a set of non-centrifugal mechanical separator elements disposed in the flow path of the gas, so that the gas is able to pass between the separator elements while the inertia of the particles directs them to the separator elements upon which they impinge and are separated and removed from the gas flow, characterised in that the set of separator

31-01-2001

16

elements is arranged in a configuration having a centre zone with a centre axis, and a circumference, wherein directional means are provided for directing the gas so that gas passing through the set of separator elements
5 flows from the circumference to the centre zone of the configuration or vice versa.

7. System according to claim 6, in which said set of separator elements is arranged as a structure having
10 consecutive particle separation levels X_N ($X_1, X_2, X_3, \dots, X_N$), N being an integer, wherein said directional means are arranged at the circumference and at the centre zone of the configuration, so as to cause the gas to flow through the set of separator elements in
15 one direction on levels with odd-numbered N and in the reversed direction on levels with even-numbered N .

8. Fluidised bed reactor system including a particle separator for separating entrained particles from a gas
20 having a flow path, comprising a set of non-centrifugal mechanical separator elements disposed in the flow path of the gas, so that the gas is able to pass between the separator elements while the inertia of the particles directs them to the separator elements upon which they
25 impinge and are separated and removed from the gas flow, characterised in that said set of separator elements is arranged as a structure having consecutive particle separation levels X_N ($X_1, X_2, X_3, \dots, X_N$), N being an integer, wherein directional means are arranged to
30 cause the gas to flow through the various levels of the structure in one direction on levels with odd-numbered N and in the reversed direction on levels with even-numbered N .

35 9. System according to claim 8, in which said set of separator elements is arranged in a configuration having a centre zone with a centre axis, and a circumference,

31-01-2001

17

wherein said directional means are located at the
circumference and at the centre zone of the
configuration, so as to cause the gas to pass through the
set of separator elements from the circumference to the
5 centre zone of the configuration or vice versa.

10. System according to any one of claims 6, 7 or 9,
wherein said configuration has a generally cylindrical
shape, preferably with the separator elements being
10 arranged essentially symmetrically.

11. System according to any one of claims 6-10,
wherein the separator elements have an elongated shape
and extend essentially in parallel with the centre axis.
15

12. System according to any one of claims 6-11,
wherein said separator elements are channel-shaped beams
having an essentially U-shaped cross-section, wherein the
beams are arranged so that the particles impinge upon the
20 bottom of the U and then fall down, guided by the
channel-shaped beam, to be collected.

13. System according to any one of claims 6-12, in
which said set of separator elements forms a number of
25 ring-shaped arrays being placed within each other.

14. System according to claim 13, in which the
separator elements of an array are circumferentially
displaced with respect to the separator elements of an
30 adjacent array.

15. System according to claim 12, or any one of
claims 13-14 when dependent of claim 12, in which each U-
shaped beam is provided with a respective additional
35 U-shaped beam attached in parallel thereto, each of the
additional U-shaped beams being provided with a
respective further U-shaped beam separator element

18

attached in parallel thereto, forming a unit with three
U-shaped beam channels, dividing plates being inserted in
at least two U-shaped beam channels for mechanical
segregation of said channels and a section of at least
5 one of the elements in the unit being removed, so as to
create three particle separation levels of impinge areas,
one for each element in the unit, wherein said
directional means are arranged to direct the gas in
alternating level directions.

10

16. System according to any one of claims 6-15,
wherein the particle separator is located inside a
reactor, preferably at the upper portion thereof, and
wherein said centre axis is in parallel with the axis of
15 the reactor, preferably co-axially.

17. System according to any one of claims 6-16,
wherein said configuration is circular cylindrical.

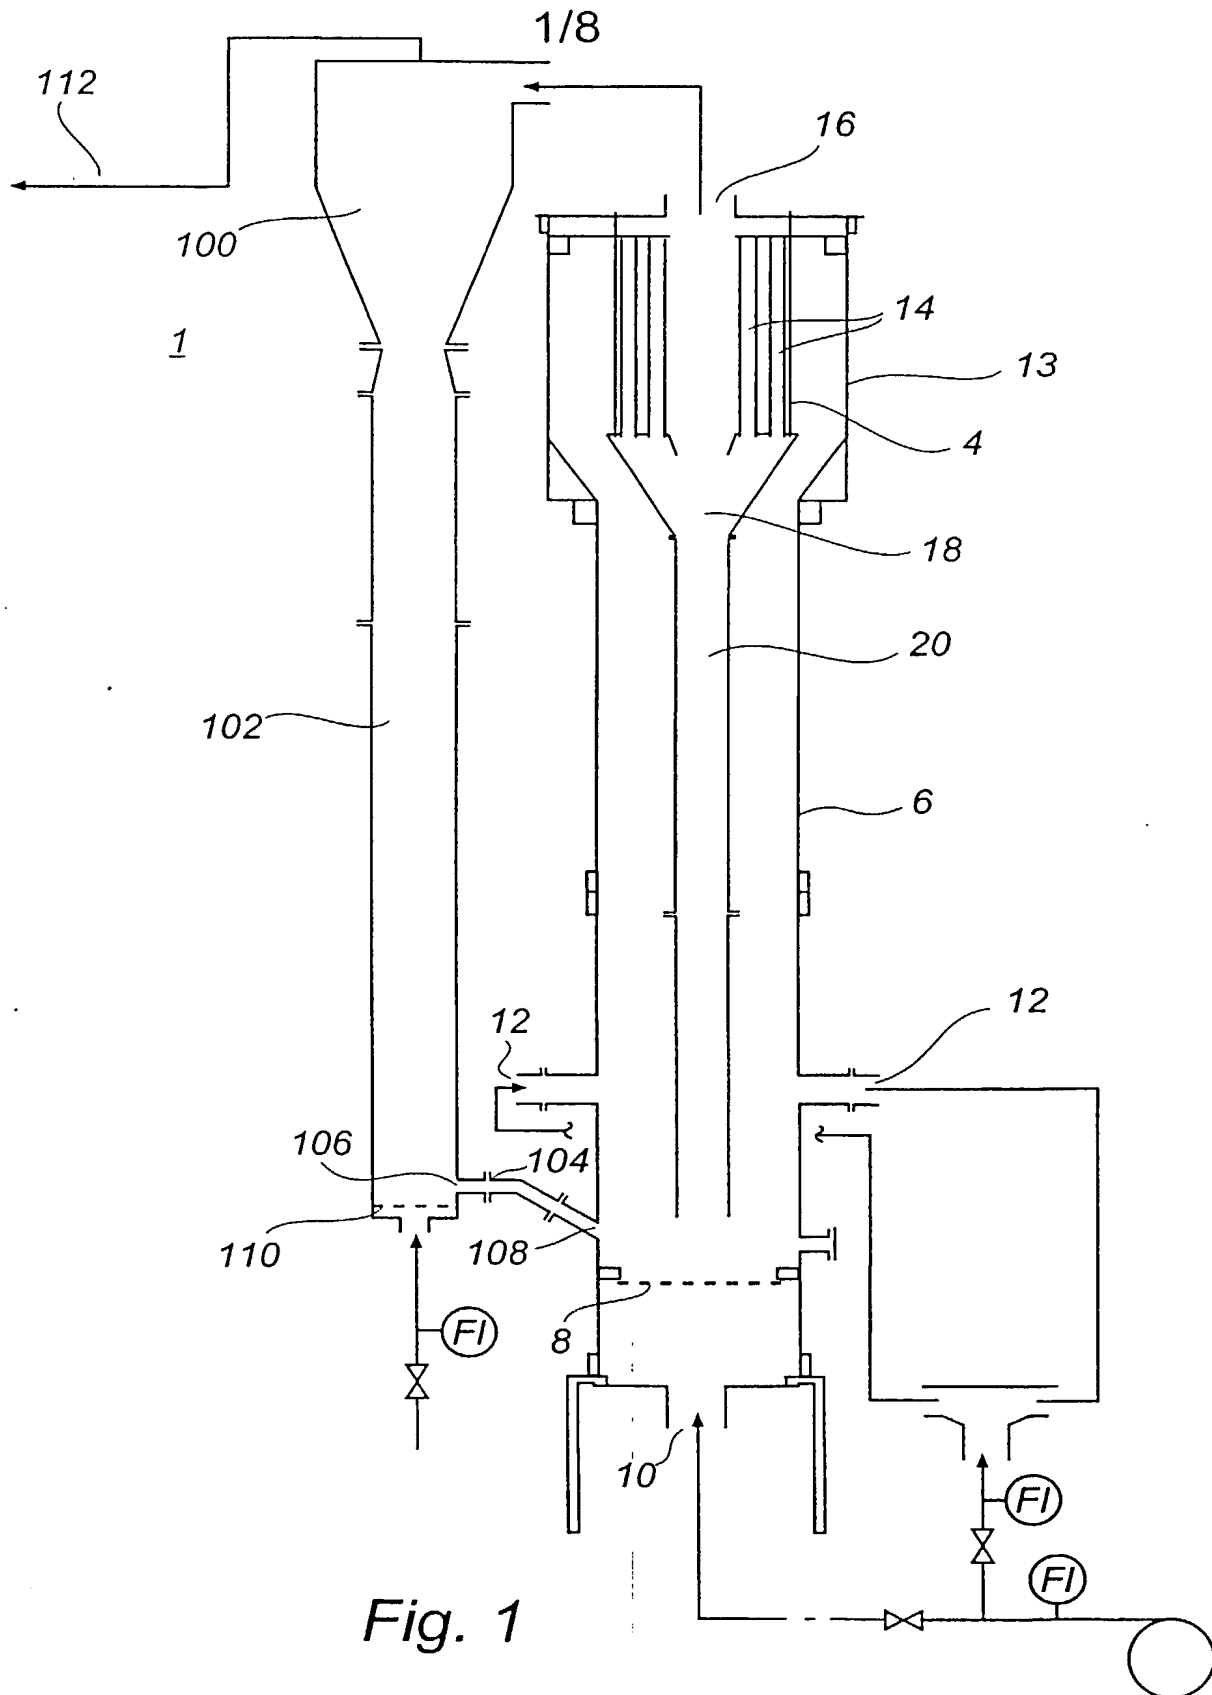


Fig. 1

2/8

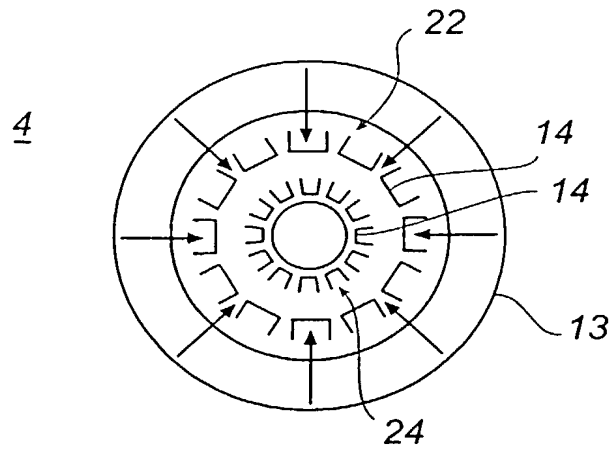


Fig. 2

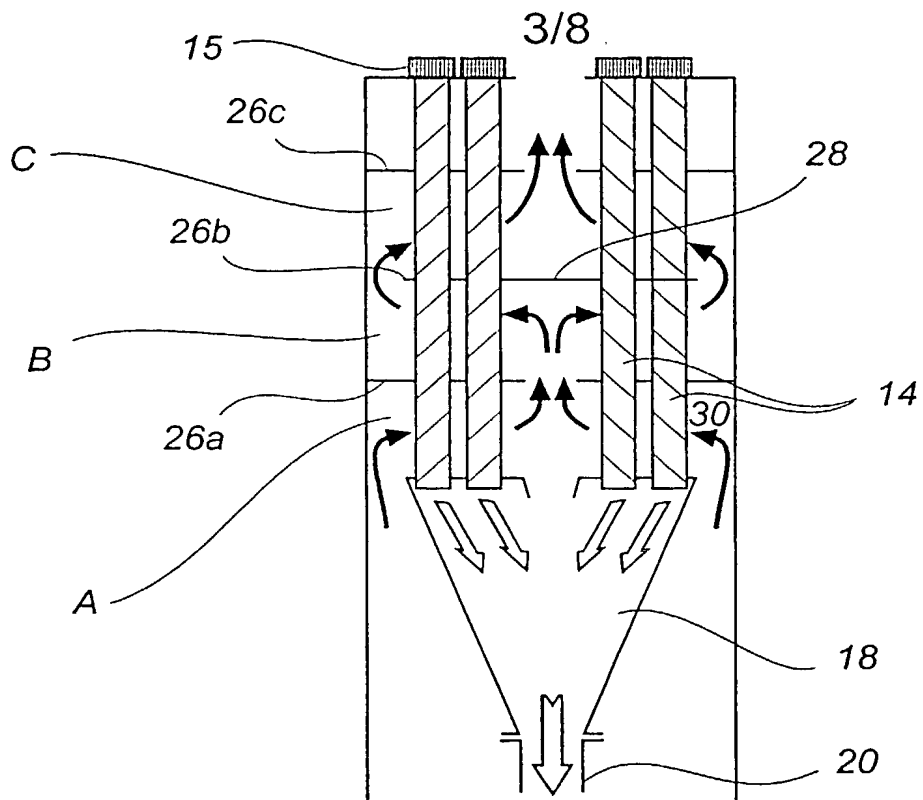


Fig. 3a

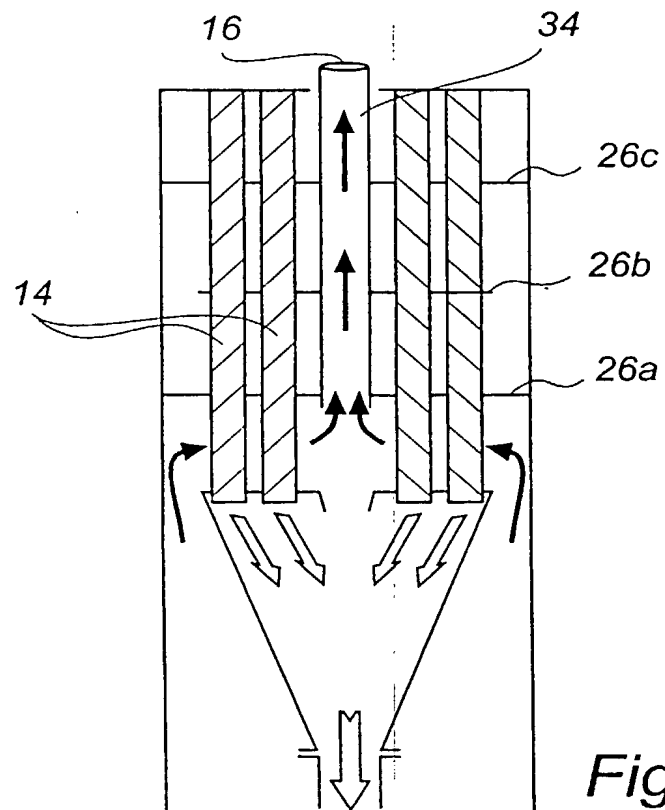


Fig. 3b

4/8

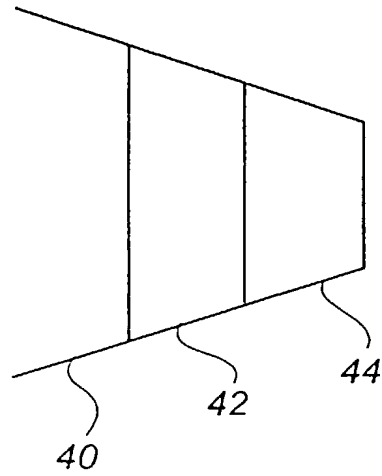


Fig. 4a

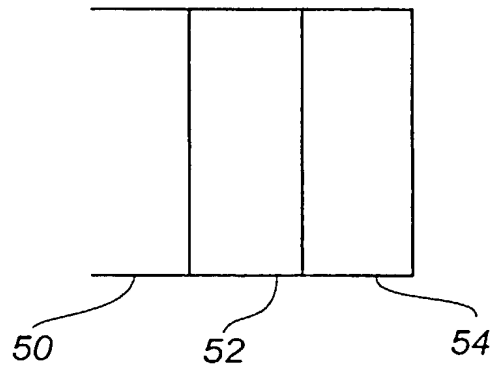


Fig. 4b

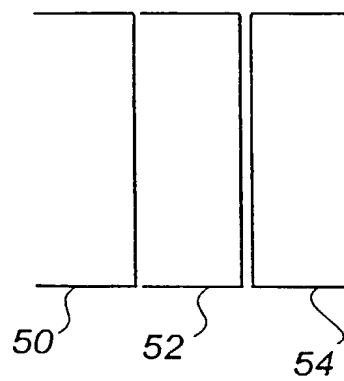


Fig. 4c

5/8

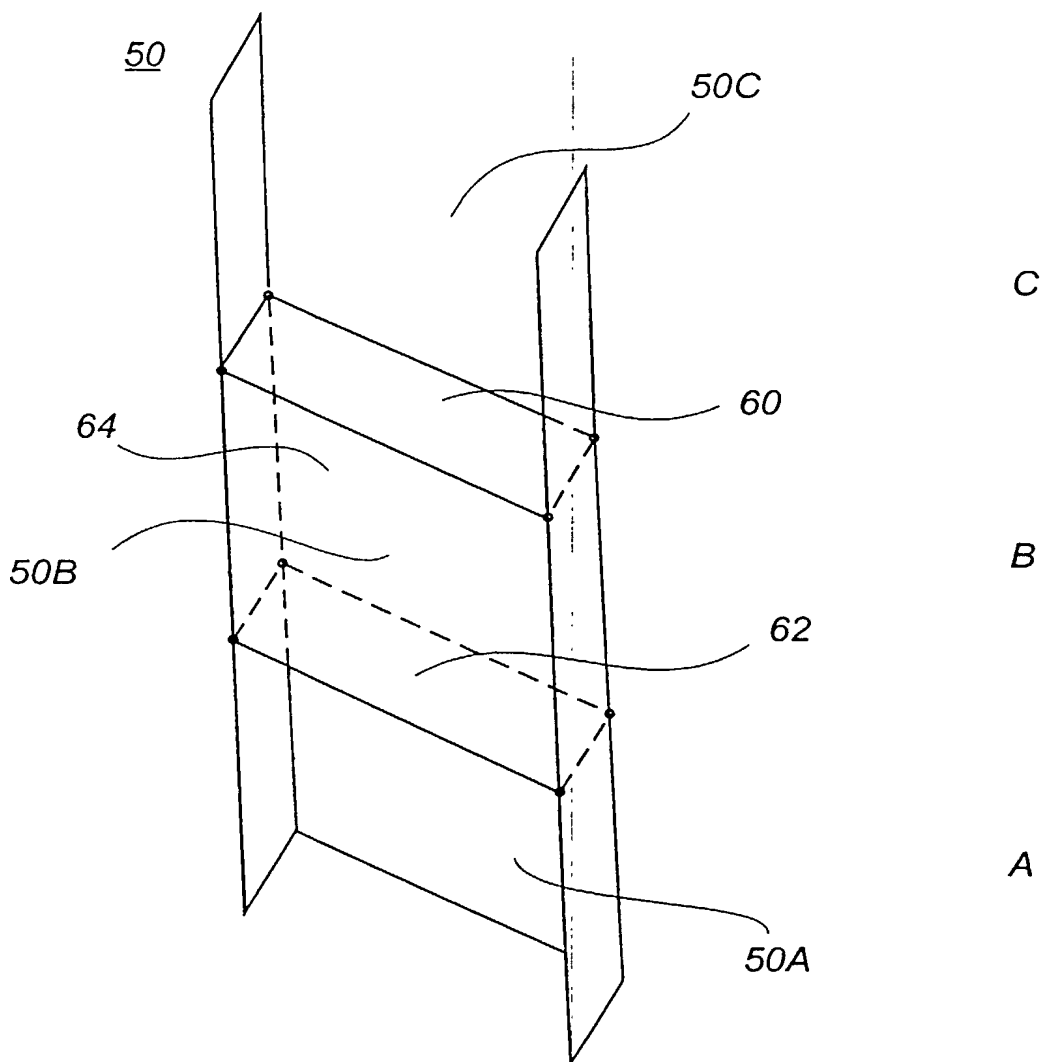


Fig. 5a

6/8

52

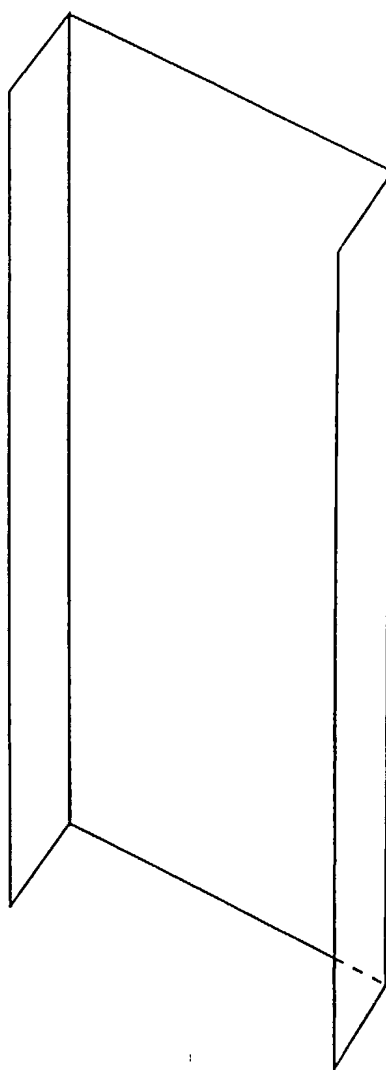


Fig. 5b

7/8

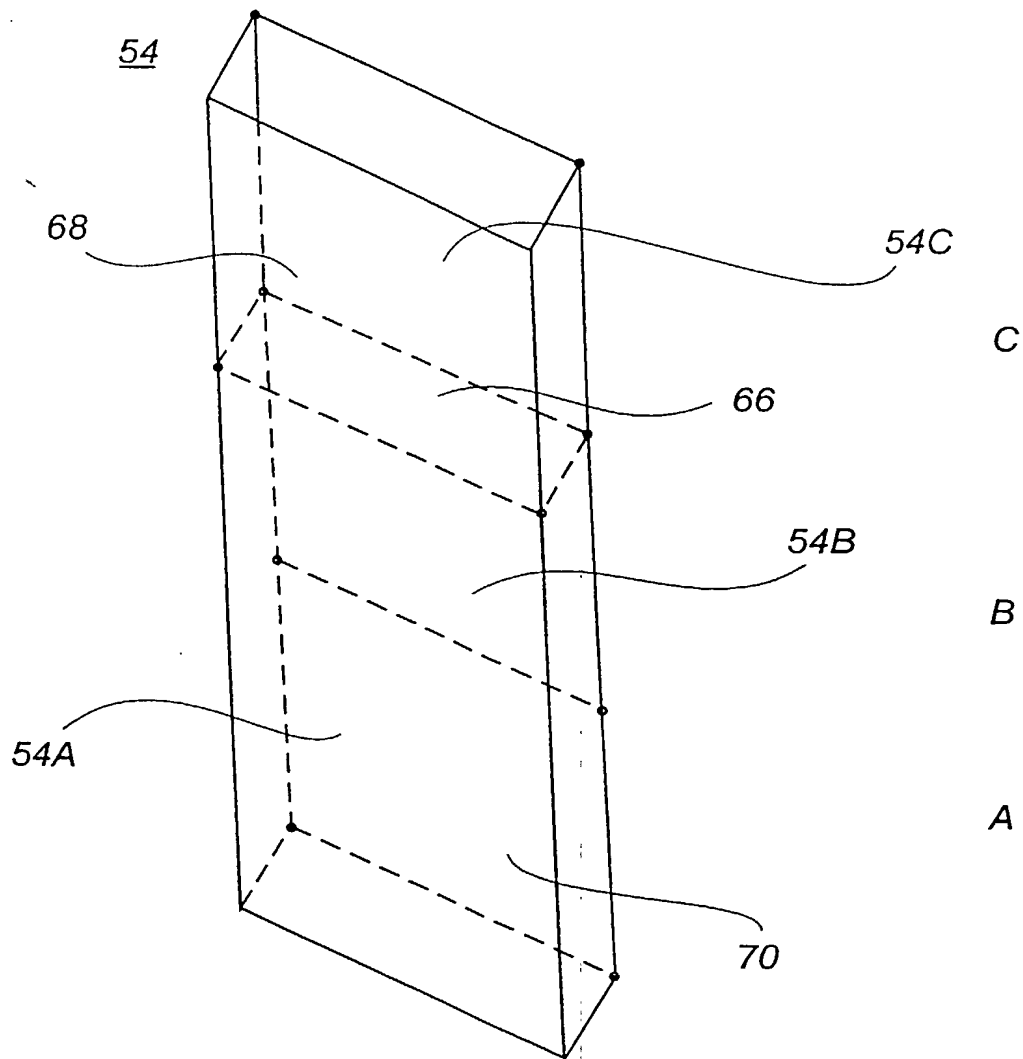


Fig. 5c

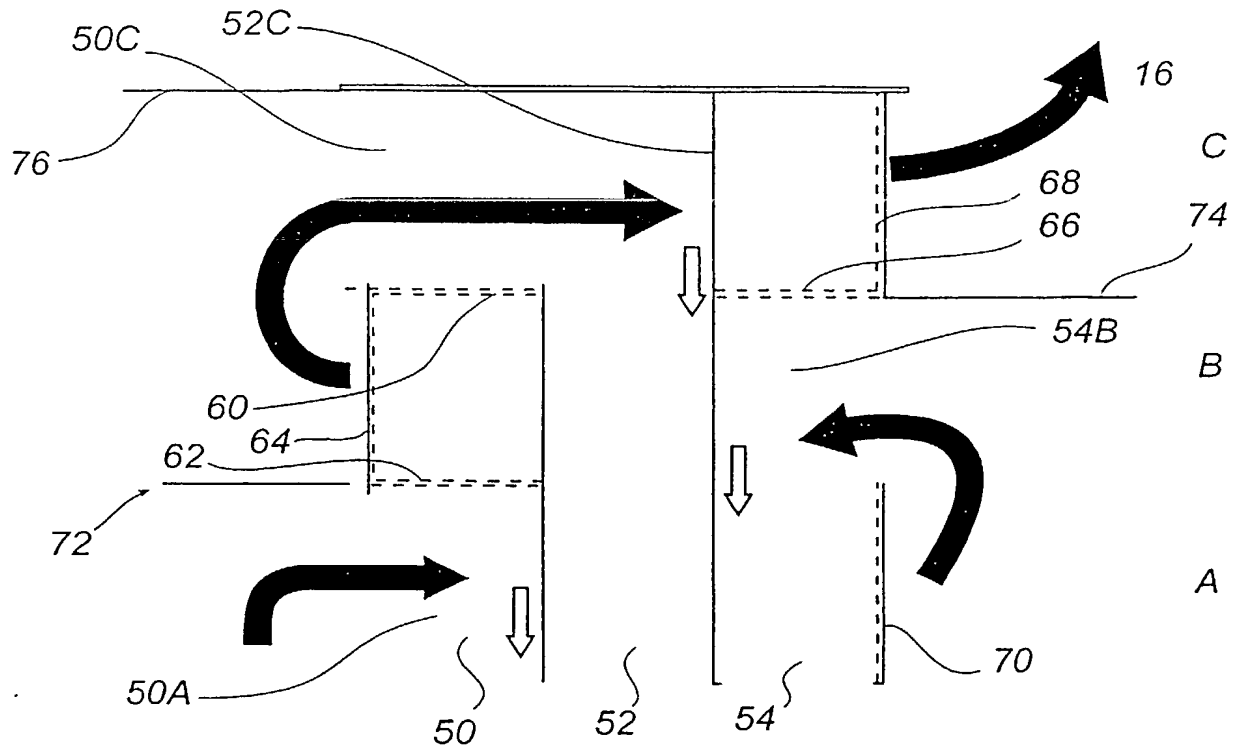


Fig. 6

WO 01/06178 A1



— Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 00/01478

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: F23C 10/08, B01D 45/08, B01J 8/24

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: B01J, F23C, B01D, F22B, F23J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4856460 A (EDWIN WIED ET AL), 15 August 1989 (15.08.89), column 3, line 64 - column 4, line 4; column 4, line 11 - line 14, figure 1, abstract --	1
A	GB 2130118 A (A AHLSTROM OSAKEYHTIO), 31 May 1984 (31.05.84), page 1, line 90 - line 93, abstract --	1-17
A	US 5070822 A (JOUNI KINNI ET AL), 10 December 1991 (10.12.91), figure 1 --	1-17

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

21 November 2000

Date of mailing of the international search report

23 -11- 2000

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Mårten Hulthén/MP
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 00/01478

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4253425 A (ROBERT L. GAMBLE ET AL), 3 March 1981 (03.03.81), column 4, line 60 - line 63; column 5, line 24 - line 35 --	1-17
A	US 5064621 A (KIYOSHI UYAMA ET AL), 12 November 1991 (12.11.91), figures 1-9, abstract --	1-17
A	US 4712514 A (ZHANG XU-YI ET AL), 15 December 1987 (15.12.87), figure 1, abstract --	1-17
A	US 5025755 A (WOLFGANG EICKVONDER ET AL), 25 June 1991 (25.06.91), abstract --	1-17
A	US 5253741 A (WALTER P. GORZEGNO), 19 October 1993 (19.10.93), figure 1 -- -----	1-17

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SE00/01478**Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)**

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

See extra sheet.

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☒ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:

4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims: it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
☐ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SE00/01478

The application contains the following groups of claims:

I. Claims 1-3. A method for separating entrained particles from gas in a fluidised bed reactor system from which gas is flowing in the axial direction of the reactor and in which the particles are separated from the gas while the gas is lead substantially in the radial direction.

II. Claims 4-5. A method for separating entrained particles from gas in a fluidised bed reactor system in which the gas is caused to flow in a stacked multilevel flow with particle separation on each level.

III. Claims 6-7. A fluidised bed reactor system including a particle separator for separating entrained particles from a gas in which gas flows from the circumference to the centre zone of the separator configuration or vice versa.

IV. Claims 8-17. A fluidised bed reactor system including a particle separator for separating entrained particles from a gas in which the separator elements are arranged as a structure having consecutive particle separation levels and the gas is lead through the different levels in one direction on one level and in another direction on the next level.

The corresponding technical feature of the different groups is that the all the claims deal with separating particles in a direction other than the "main flow direction". However, this feature is known per se by US A 4856640 (e.g. figure 1; column 3, line 64 - column 4, line 14). Consequently, the inventions listed as Groups I - IV do not relate to a single inventive concept under PCT Rule 13.1, because, under PCT Rule 13.2, they lack the same or corresponding technical features.

INTERNATIONAL SEARCH REPORT
Information on patent family members

02/11/00

International application No.

PCT/SE 00/01478

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
US	4856460	A	15/08/89	CA	1307425 A	15/09/92
				DE	3715516 A	17/11/88
GB	2130118	A	31/05/84	AT	385208 B	10/03/88
				AT	397083 A	15/08/87
				CA	1249973 A	14/02/89
				DE	3339317 A,C	17/05/84
				FI	66297 B,C	29/06/84
				FI	823908 A	16/05/84
				GB	8328557 D	00/00/00
				SE	459232 B,C	19/06/89
				SE	8306254 A	16/05/84
US	5070822	A	10/12/91	AT	15391 A	15/01/95
				AT	400071 B	25/09/95
				CS	9100198 A	15/09/91
				CZ	279397 B	12/04/95
				DE	4101918 A	01/08/91
				ES	2030358 A	16/10/92
				FI	88200 B,C	31/12/92
				FI	900436 A	30/07/91
				FR	2657683 A,B	02/08/91
				GB	2240285 A,B	31/07/91
				GB	9101324 D	00/00/00
				HU	210742 B	28/07/95
				HU	910154 D	00/00/00
				IT	1246140 B	15/11/94
				IT	RM910069 D	00/00/00
				PL	164683 B	30/09/94
				SE	508061 C	17/08/98
				SE	9100152 A	30/07/91
US	4253425	A	03/03/81	CA	1120463 A	23/03/82
				GB	2046886 A,B	19/11/80
				GB	2118064 A,B	26/10/83
				GB	8307402 D	00/00/00
US	5064621	A	12/11/91	DE	69101846 D,T	15/09/94
				EP	0438169 A,B	24/07/91
				FI	910270 A	20/07/91
				JP	3213902 A	19/09/91
US	4712514	A	15/12/87	NONE		

INTERNATIONAL SEARCH REPORT

Information on patent family members

02/11/00

International application No.

PCT/SE 00/01478

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
US	5025755	A	25/06/91	AT	63627 T	15/06/91
				AU	600539 B	16/08/90
				AU	8239787 A	16/06/88
				CN	1013514 B	14/08/91
				CN	87101185 A	29/06/88
				CS	8708508 A	17/12/91
				CZ	278691 B	18/05/94
				DD	266632 A	05/04/89
				DE	3640377 A,C	09/06/88
				DE	3770175 D	00/00/00
				EP	0331681 A,B	13/09/89
				SE	0331681 T3	
				ES	2005466 A	01/03/89
				FI	892569 A	26/05/89
				IN	168541 A	20/04/91
				JP	2501497 T	24/05/90
				JP	7009281 B	01/02/95
				NO	883255 A	22/07/88
				PL	268923 A	18/08/88
				SK	277991 B	13/09/95
				WO	8804010 A	02/06/88
				ZA	8708893 A	31/08/88
US	5253741	A	19/10/93	CA	2081401 A	16/05/93
				EP	0559985 A	15/09/93
				JP	5223210 A	31/08/93
				MX	9206389 A	30/06/94
				US	5218931 A	15/06/93

**COMBINED DECLARATION AND POWER OF ATTORNEY
FOR UTILITY PATENT APPLICATION**

Attorney's Docket No.

003300-894

As a below-named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I BELIEVE I AM THE ORIGINAL, FIRST AND SOLE INVENTOR (if only one name is listed below) OR AN ORIGINAL, FIRST AND JOINT INVENTOR (if more than one name is listed below) OF THE SUBJECT MATTER WHICH IS CLAIMED AND FOR WHICH A PATENT IS SOUGHT ON THE INVENTION ENTITLED:

PARTICLE SEPARATOR

the specification of which

(check one)

☐

is attached hereto;

☒

was filed on July 11, 2000 as

Application No. PCT/SE00/01478

and was amended on September 26, 2000 and
January 31, 2000;
(if applicable)

I HAVE REVIEWED AND UNDERSTAND THE CONTENTS OF THE ABOVE-IDENTIFIED SPECIFICATION, INCLUDING THE CLAIMS, AS AMENDED BY ANY AMENDMENT REFERRED TO ABOVE;

I ACKNOWLEDGE THE DUTY TO DISCLOSE TO THE OFFICE ALL INFORMATION KNOWN TO ME TO BE MATERIAL TO PATENTABILITY AS DEFINED IN TITLE 37, CODE OF FEDERAL REGULATIONS, Sec. 1.56 (as amended effective March 16, 1992);

I do not know and do not believe the said invention was ever known or used in the United States of America before my or our invention thereof, or patented or described in any printed publication in any country before my or our invention thereof or more than one year prior to said application; that said invention was not in public use or on sale in the United States of America more than one year prior to said application; that said invention has not been patented or made the subject of an inventor's certificate issued before the date of said application in any country foreign to the United States of America on any application filed by me or my legal representatives or assigns more than twelve months prior to said application;

I hereby claim foreign priority benefits under Title 35, United States Code Sec. 119 and/or Sec. 365 of any foreign application(s) for patent or inventor's certificate as indicated below and have also identified below any foreign application for patent or inventor's certificate on this invention having a filing date before that of the application(s) on which priority is claimed:

COMBINED DECLARATION AND POWER OF ATTORNEY

Attorney's Docket No.

003300-894

COUNTRY/INTERNATIONAL	APPLICATION NUMBER	DATE OF FILING (day, month, year)	PRIORITY CLAIMED
Sweden	9902711-2	15 July 1999	YES <u>X</u> NO <u> </u>
			YES <u> </u> NO <u> </u>

I hereby appoint the following attorneys and agent(s) to prosecute said application and to transact all business in the Patent and Trademark Office connected therewith and to file, prosecute and to transact all business in connection with international applications directed to said invention:

William L. Mathis	17,337	Eric H. Weisblatt	30,505	Bruce T. Wieder	33,815
Robert S. Swecker	19,885	James W. Peterson	26,057	Todd R. Walters	34,040
Platon N. Mandros	22,124	Teresa Stanek Rea	30,427	Ronni S. Jillions	31,979
Benton S. Duffett, Jr.	22,030	Robert E. Krebs	25,885	Harold R. Brown III	36,341
Norman H. Stepno	22,716	William C. Rowland	30,888	Allen R. Baum	36,086
Ronald L. Grudziecki	24,970	T. Gene Dillahunt	25,423	Brian P. O'Shaughnessy	32,747
Frederick G. Michaud, Jr.	26,003	Patrick C. Keane	32,858	Kenneth B. Leffler	36,075
Alan E. Kopecki	25,813	B. Jefferson Boggs, Jr.	32,344	Fred W. Hathaway	32,236
Regis E. Slutter	26,999	William H. Benz	25,952	Wendi L. Weinstein	34,456
Samuel C. Miller, III	27,360	Peter K. Skiff	31,917	Mary Ann Dillahunt	34,576
Robert G. Mukai	28,531	Richard J. McGrath	29,195	Donna M. Meuth	36,607
George A. Hovanec, Jr.	28,223	Matthew L. Schneider	32,814	Mark R. Kresloff	42,766
James A. LaBarre	28,632	Michael G. Savage	32,596		
E. Joseph Gess	28,510	Gerald F. Swiss	30,113		
R. Danny Huntington	27,903	Charles F. Wieland III	33,096		



21839

and:

Address all correspondence to:



21839

Benton S. Duffett, Jr.
BURNS, DOANE, SWECKER & MATHIS, L.L.P.
P.O. Box 1404
Alexandria, Virginia 22313-1404

Address all telephone calls to: Benton S. Duffett, Jr. at (703) 836-6620.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

FULL NAME OF SOLE OR FIRST INVENTOR	SIGNATURE	DATE
LENNART AHLGREN		04 Feb 2002
RESIDENCE	CITIZENSHIP	
Oxelösund, Sweden	Sweden	
POST OFFICE ADDRESS		
Styrbordsvägen 116, SE-613 35 Oxelösund, Sweden		
FULL NAME OF SECOND JOINT INVENTOR, IF ANY	SIGNATURE	DATE
ERIK RENSFELT		29 JAN 2002
RESIDENCE	CITIZENSHIP	
Nyköping, Sweden	Sweden	
POST OFFICE ADDRESS		
Vitriskestigen 10, SE-611 63 Nyköping, Sweden		